
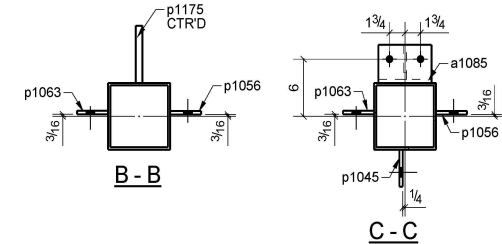



BILL OF MATERIAL						
MARK	QTY	SIZE	LENGTH (ft-in)	GRADE	AREA (sq)	WEIGHT (lb)
C1002	1	HSS7X7X1/4	29'-5 1/4"	A500-GR.B	9898.00	676.23
a1085	1	L4X4X3/8	0'-6"	A36	101.72	4.87
p1004	1	PL1"x13"	1'-1"	A36	390.00	47.93
p1010	2	FL3/8"x3 1/2"	0'-6"	A36	49.12	4.47
p1022	1	PL3/8"x3 5/8"	0'-3 5/8"	A36	17.05	0.67
p1045	1	PL3/8"x3 7/8"	2'-6 3/16"	A36	259.60	12.45
p1056	1	FL3/8"x3 1/2"	1'-9"	A36	165.38	7.82
p1063	1	FL3/8"x3 1/2"	2'-7 5/16"	A36	245.23	11.65
p1117	1	FL1/4"x7"	0'-7"	A36	105.00	3.47
p1175	1	FL3/4"x6"	0'-6"	A36	90.00	7.66
TOTALS:					11094.77	777.20

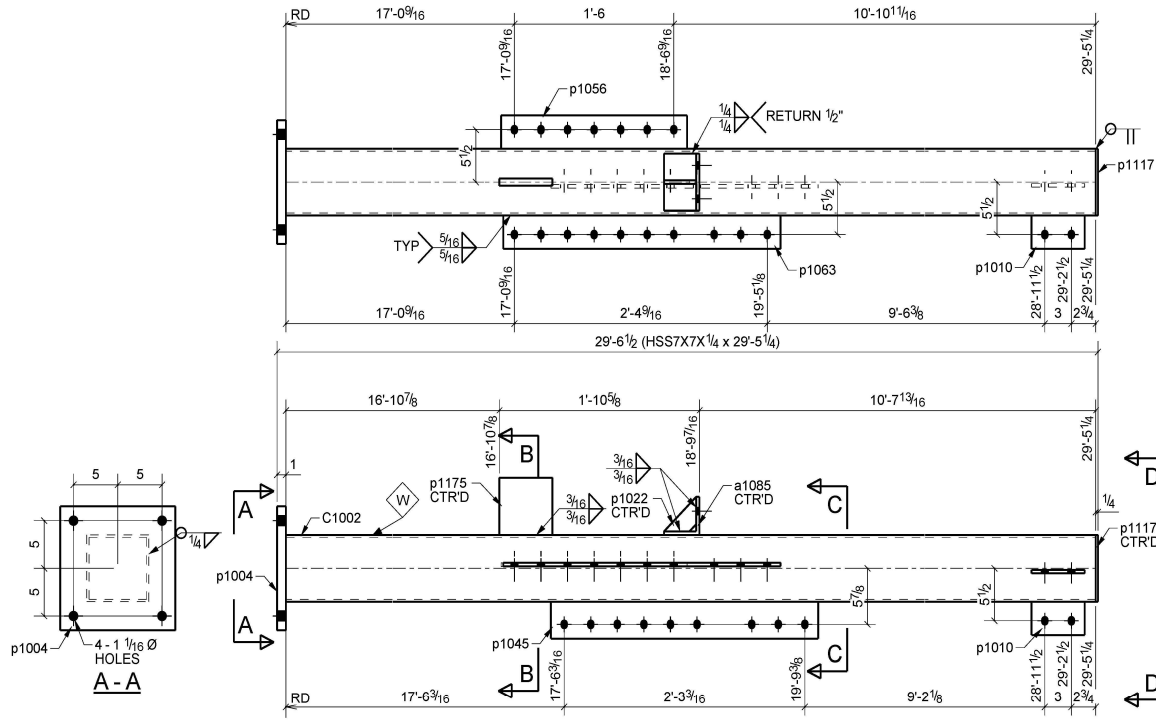

FOR FABRICATION

Tektis Structures					CLIENT	DRAWN	NJ	10/14/2016				
						CHECKED	DJ	10/14/2016				
		NJ	10/14/2016	ISSUED FOR FABRICATION	PROJECT	GENERAL NOTES WELD SIZE EQUAL 1/16" < THINNEST MATERIAL BEING WELDED U.N.O. ALL HOLES 13/16" DIA UNO COPE RADIUS = 1/2" U.N.O. TOTAL WEIGHT 777.20 lbf STEEL GRADE A500-GR.B FINISH			SCALE	JOB No	DWG No.	REV
		RN	06/22/2016	ISSUED FOR APPROVAL					NTS	16-034	C1002	
	REV	BY	DATE	DETAILS	LOCATION FRISCO, TEXAS							